


# DCL

DCL clamps are manufactured in one-piece with a clasp hooked on a pawl preventing even accidental release. Clamping force is evenly distributed throughout the clamp and the smooth inside protects the hose from damage. They are particularly suitable for mass industrial productions thanks to their fast and easy fitting.

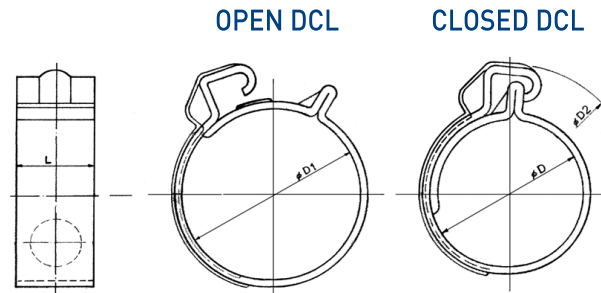

CODE	RANGE		CLOSED DIAM. mm	COLOR
	Min.	Max.		
DCL080	8,5	9,5	8,0	blue
DCL085	9,0	10,0	8,5	green
DCL090	9,5	11,0	9,0	purple
DCL095	10,0	11,5	9,5	black
DCL100	10,5	11,5	10,0	green
DCL105	11,0	12,0	10,5	blue
DCL110	11,5	12,5	11,0	green
DCL115	12,0	13,0	11,5	purple
DCL120	12,5	13,5	12,0	black
DCL125	13,0	14,0	12,5	red
DCL130	13,5	14,5	13,0	green
DCL135	14,0	15,0	13,5	purple
DCL140	14,5	15,5	14,0	red
DCL145	15,0	16,0	14,5	purple
DCL150	15,5	16,5	15,0	black
DCL155	16,0	17,0	15,5	blue

CODE	RANGE		CLOSED DIAM. mm	COLOR
	Min.	Max.		
DCL160	16,5	17,5	16,0	green
DCL165	17,0	18,0	16,5	black
DCL170	17,5	18,5	17,0	red
DCL175	18,0	19,0	17,5	blue
DCL180	18,5	19,5	18,0	green
DCL185	19,0	20,0	18,5	purple
DCL190	19,5	21,0	19,0	blue
DCL195	20,0	21,5	19,5	black
DCL200	20,5	22,0	20,0	red
DCL205	21,0	22,5	20,5	blue
DCL210	21,5	23,0	21,0	green
DCL215	22,0	23,5	21,5	purple
DCL220	22,5	24,0	22,0	black
DCL225	23,0	24,5	22,5	red
DCL230	23,5	25,0	23,0	blue
DCL235	24,0	25,5	23,5	green

**THICKNESS:** 0,5 mm COD. DCL080 to COD. DCL100  
0,6 mm COD. DCL105 to COD. DCL235

**WIDTH:** 6 mm COD. DCL080 to COD. DCL135  
8 mm COD. DCL140 to COD. DCL235

\* Other sizes available on request



For further details see pag. 74-75



## MATERIALS




• 304 SS



## APPLICATIONS

- Automotive and engines
- White goods
- Beverage industry
- General industry

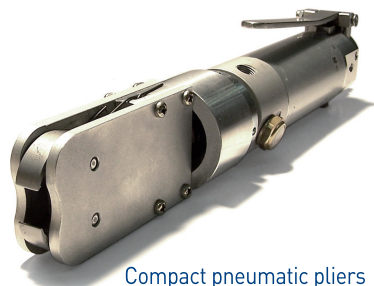

Assembly and disassembly manual pliers