


CTS (Springband)

OEM applications; the “spring effect” compensates least diametrical variations, the perfect roundness guarantees a uniform radial pressure on 360°.

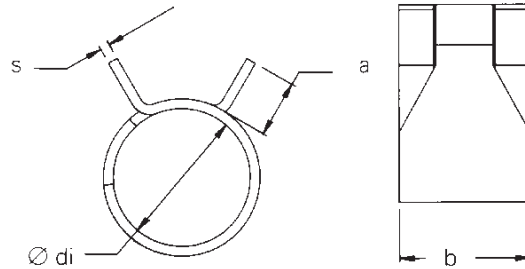

CODE	Ø d	Ø di	BAND WIDTH b mm	a ± 0.5	THICKNESS s mm	APPLICATION SIZE	
						min.	max.
CTS006	6	5,5	7	3	0,5	5,9	6,1
CTS007	7	6,4	7	3	0,5	6,9	7,1
CTS008	8	7,4	8	3	0,6	7,9	8,2
CTS009	9	8,4	8	3,5	0,6	8,9	9,3
CTS010	10	9,3	8	3,5	0,7	9,9	10,4
CTS011	11	10,3	8	4	0,7	10,9	11,5
CTS012	12	11,1	8	4	0,7	11,9	12,6
CTS014	14	12,9	8	4	0,8	13,8	14,6
CTS015	15	13,5	8	4,5	0,8	14,8	15,8
CTS017	17	15,6	8	4,5	0,8	16,8	18
CTS020	20	18,4	8	3,2	0,8	20	21,3

Packaging: 500 pieces carton box



MATERIALS



- Spring carbon steel, RoHS compliant coating



UPON REQUEST

12 and 15 mm band width