
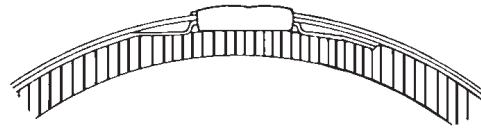


# Band-It junior

Preformed smooth internal diameter. clamps are manufactured in a wide variety of sizes and materials; vibration resistant and automatically locked with one simple lever movement. Junior clamps are ideal where superior strength is required.

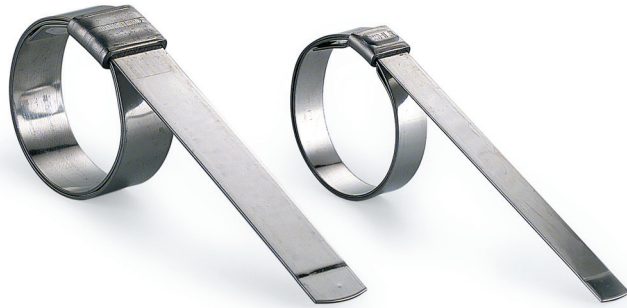

LOW PROFILE

SMOOTH INSIDE

Customized sizes available on request



## MATERIALS



- 201 Stainless steel



More details on pages 74-75



## APPLICATIONS

- Agricultural machines
- Sewer cleaner equipment
- Railways
- Welding equipment



5750

Pneumatic tool

## S-750: PNEUMATIC TOOL

- Ideal for large volume applications
- Lubrification, speed and tension control

## MANUAL TOOLS C001 + J001 o C002



C001

Manual tool



J001

Adapter



C002

Compact tool

# Band-It Junior

CODE	DIAMETER	BAND WIDTH	BAND THICKNESS	PACKAGING		
	mm	mm	mm	Pcs/box		
JS240 (J240)	20,6	6,4	0,51			
JS242 (J242)	25,4					
JS241 (J241)	34,9					
JS252	38,1					
JS253	50,8					
JS220	63,5					
JS256	69,9					
JS244	76,2					
JS257	88,9					
JS258	101,6					
JS259	114,3					
JS201 (J201)	20,6				9,5	0,64
JS243 (J243)	25,4					
JS202 (J202)	34,9					
JS217	38,1					
JS245 (J245)	50,8					
JS221	63,5					
JS246 (J246)	76,2					
JS255	88,9					
JS248	101,6					
JS203 (J203)	25,4	12,7	100			
JS204 (J204)	31,8					
JS231	38,1					
JS236 (J236)	44,5					
JS237	50,8					
JS233	63,5					
JS230 (J230)	69,9					
JS234	76,2					
JS247	88,9					
JS249 (J249)	101,6					
JS205	38,1				15,9	0,76
JS206	44,5					
JS207	50,8					
JS208	57,2					
JS209	63,5					
JS227	50,8					
JS210	69,9					
JS211	76,2	19,1	50			
JS212	88,9					
JS213	101,6					
JS214	114,3					
JS215	127,0					
JS270	133,4		25			
JS216	152,4					
JS217US	165,1					
JS218	177,8					
JS219	203,2					

• In brackets codes available with bended tail under the buckles.